

# WET WALL

## Technical Data Sheet


**Wet Wall panels** are made from 10mm rigid PVC with a decorative face. All panels have a tongue and grooved long edge

**SIZE/WEIGHT** 2400 x 1000 x 10mm/ 11kg  
(standard) can be custom made to suit markets from 250mm - 1200mm wide  
1500mm - 6000mm long

**PANELS/PACK** 2 (individual panels available at a supplementary cost)

**COLOURS** Please refer to brochure (over 80+ available)

**ACCESSORIES** **Wet Wall panel** PVC edge profiles 2.4m long are available in three profiles and various finishes: Silver, White, Beige and Black \*can be colour matched to panel design.

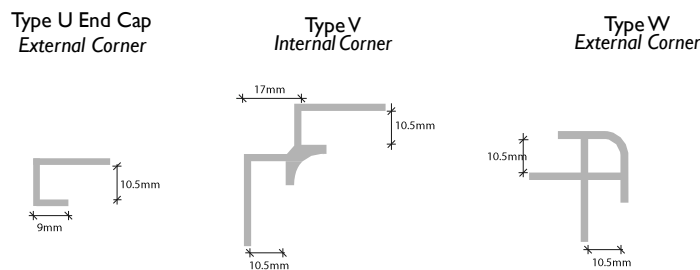

### CLEANING

The panels should be cleaned using warm water and a non-abrasive mild detergent (not bleach). Scouring products or powders should not be used.

### FIRE & SMOKE RATING

**Wet Wall panel** carries a Group I class, when tested for heat and smoke release in accordance with AS/NZS 3837:1998. The panels have an average specific extinction area of 505m<sup>2</sup>/kg. No specific fire-fighting instructions are required.

### THERMAL PROPERTIES

**Wet Wall panel** can with-stand surface temperatures / heat of up to 60°C before any discolouration or warping of the PVC.

### CHEMICAL RESISTANCE

PVC is resistant to caustics, mineral oil, and foodstuffs like milk and coffee etc.

### IMPACT RESISTANCE

Test EN13245-1:2004: pass: 5 joules at 23degrees centigrade.

### SCALE FORMATION

Low susceptibility to hard water. Standard scale remover can be used on any scale build-up.